

Compact isolator for indoor use

Conform IEC 62271-102


EME type MI-CI

*U_r: 3,6 - 36 kV

*I_r: 400 - 1600 A

*I_k: 12,5 - 50 kA/1s

* Other values available on demand!

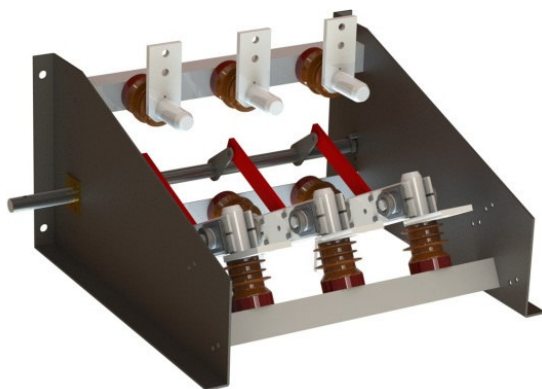

MI-CI 3,6kV 1250A Manual


MAIN FEATURES

The changeover disconnecter type MI-CI has following features:

- Disconnecter with 2 positions: closed pos.1 – closed pos.2 (both positions are not connected to the earth)
- Endurance class M0; 1000 C-O (close-open cycles)
- Standard execution: 3pole. Also available as 1p, 2p, 4p, 5p or 6p execution.
- On demand : mounting of switch possible in each position

ACCESSORIES (See also BR080 for more information)

- Beside standard execution, other types of auxiliary contacts available:
 - Heavy DC-currents
 - Very low currents (e.g. PLC-applications)
 - Positively driven contacts (IEC 60947-5-1)
 - IP67 execution
- Electro-mechanical interlock (100% ED) standard in several supply voltages:
 - 24, 110-125, 205-220 VDC
 - 230 VAC
 - Standard execution = interlocking without voltage supply
- Standard motor drives available, type D or M in several supply voltages:
 - 24, 110, 125, 220 VDC
 - 230, 3x400 VAC
 - Control system standard included and mounted on the disconnecter
 - Manual emergency lever included
- Shaft extensions and removable operating levers for manual disconnectors
- Key or padlock interlock

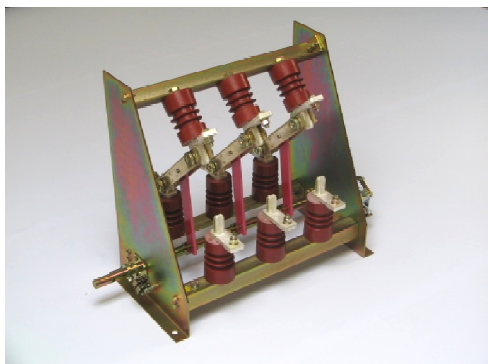

MI-CI 7,2kV 630A Manual



Electro Mechanic Equipment nv-sa
Zuurbemde 51
3380 Glabbeek (Belgium)

www.eme.be thv@eme.be

☎ +32 (0)16 77 23 00 📠 +32 (0)16 77 89 03
BTW-VAT-TVA : BE 0415.742.790