

Compact isolator for indoor use

Conform IEC 62271-102


## EME type MI-CI3

\*U<sub>r</sub>: 2 - 36 kV

\*I<sub>r</sub>: 400 - 1600 A

\*I<sub>k</sub>: 12,5 - 50 kA/1s


\* Other values available on demand!

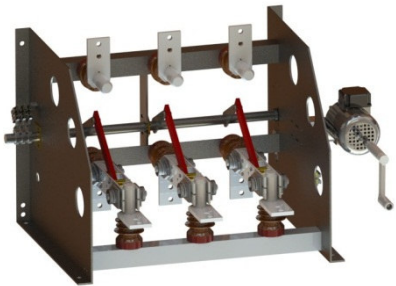

MI-CI30Y 7,2kV 1250A + Motor D



MI-CI3 17,5kV 400A 6P + Motor M

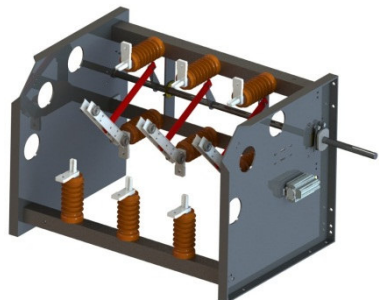

MI-CI30Y 17,5kV 630A Manual

### MAIN FEATURES

The 3-positions changeover disconnecter type MI-CI3 has following features:

- 3 position disconnecter (X - Y- Z), available in 5 different configurations:
  - MI-CI3
  - MI-CI3PY
  - MI-CI3PZ
  - MI-CI30Y
  - MI-CI30YPZ
- Endurance class M0; 1000 C-O (close-open cycles)
- Standard execution: 3pole. Also available as 1p, 2p, 4p, 5p or 6p execution.
- On demand : mounting of switch possible in each position

### ACCESSORIES (See also BR080 for more information)

- Beside standard execution, other types of auxiliary contacts available:
  - Heavy DC-currents
  - Very low currents (e.g. PLC-applications)
  - Positively driven contacts (IEC 60947-5-1)
  - IP67 execution
- Electro-mechanical interlock (100% ED) standard in several supply voltages:
  - 24, 110-125, 205-220 VDC
  - 230 VAC
  - Standard execution = interlocking without voltage supply
- Standard motor drives available, type D or M in several supply voltages:
  - 24, 110, 125, 220 VDC
  - 230, 3x400 VAC
  - Control system standard included and mounted on the disconnecter
  - Manual emergency lever included
- Shaft extensions and removable operating levers for manual disconnectors
- Key or padlock interlock



**Electro Mechanic Equipment** nv-sa  
Zuurbemde 51  
3380 Glabbeek (Belgium)

[www.eme.be](http://www.eme.be) thv@eme.be

☎ +32 (0)16 77 23 00 📠 +32 (0)16 77 89 03  
BTW-VAT-TVA : BE 0415.742.790