


Compact isolator for indoor use
Conform IEC 62271-102


EME type MSI

***U_i: 2 - 52 kV**
***I_r: 400 - 6300 A**
***I_k: 25 - 40 kA/1s**


* Other values available on demand!



MSI 17,5kV 1250A

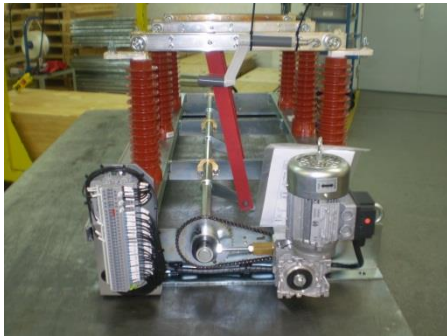

MSI 36kV 630A + Motor D

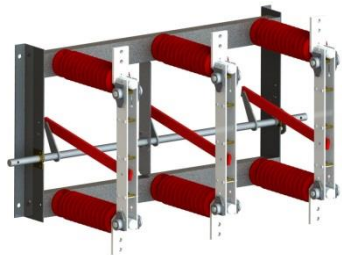

MSI 36kV 1250A

MAIN FEATURES

The MSI has following features:

- 2 position disconnecter: Closed - open
- Mechanical Endurance, till 2.000 C-O cycles is assured.
- Standard execution: 3p. Also available as 1p, 2p, 4p or 5p execution.
- On demand : mounting possible in each position with anti-closing device
- On demand : Higher Endurance up to 10.000 C-O available

ACCESSORIES (See also BR080 for more information)

- Different types of auxiliary contacts available:
 - Standard execution
 - Heavy DC-currents
 - Very low currents (e.g. PLC)
 - Positively driven contacts (IEC 60947-5-1)
 - IP67 execution
- Electro-mechanical interlock (100% ED) standard in several supply voltages:
 - 24, 110-125, 205-220 VDC
 - 230 VAC
- Standard motor drives available, type D or M in several supply voltages:
 - 24, 110, 125, 220 VDC
 - 230, 3x400 VAC
- Shaft extensions and removable operating levers for manual disconnectors



Electro Mechanic Equipment nv-sa
Zuurbemde 51
3380 Glabbeek (Belgium)

www.eme.be thv@eme.be

+32 (0)16 77 23 00 +32 (0)16 77 89 03
BTW-VAT-TVA : BE 0415.742.790